


Universal ZIF Sockets

Photograph




Specifications (Material)

Socket Body Material	-	UL94V-0 Glass Filled Polyphenylene Sulphide (PPS) – BLACK
Handle	-	Stainless Steel
Handle Knob	-	Brass Alloy 360, ½ Hard
Contacts	-	Beryllium Copper Alloy 172 per QQ-C-533
Beryllium Copper Plating	-	100µ [2.54µm] min Tin per MIL-T-10727
Life Cycles	-	25,000 to 50,000 Cycles.

Specifications (Electrical)

Contact Current	-	1 Amps
Insulation Resistance	-	1000MΩ min
Withstand Voltage	-	1000 Vac
Operating Temperature	-	-55°C to 105°C

Technical Drawing

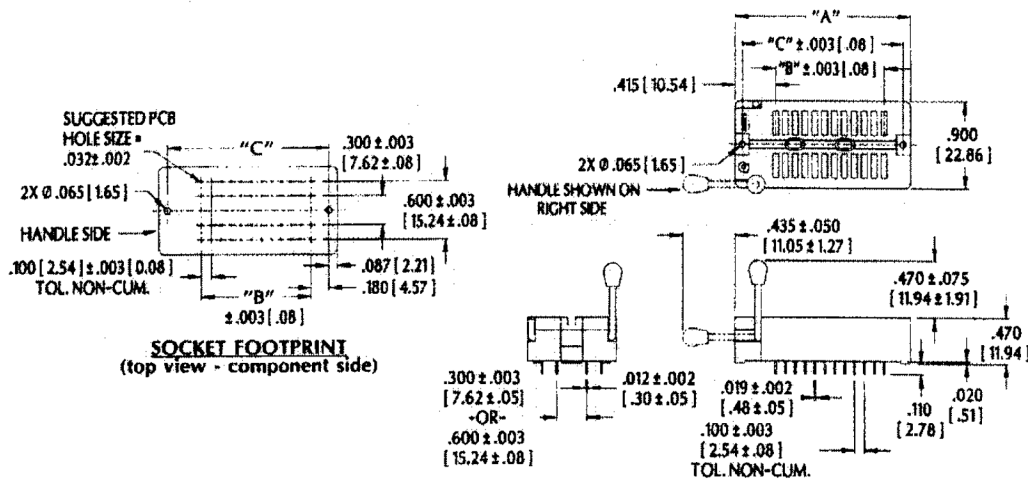

Information

Pins	Dimension A	Dimension B	Dimension C
24	45.47mm	27.94mm	41.02mm
28	50.55mm	33.02mm	46.10mm
32	55.63mm	38.10mm	51.18mm
40	65.79mm	48.26mm	61.34mm